



HYBRID STEPPING MOTOR SPECIFICATION

DIMENSIONS unit=mm

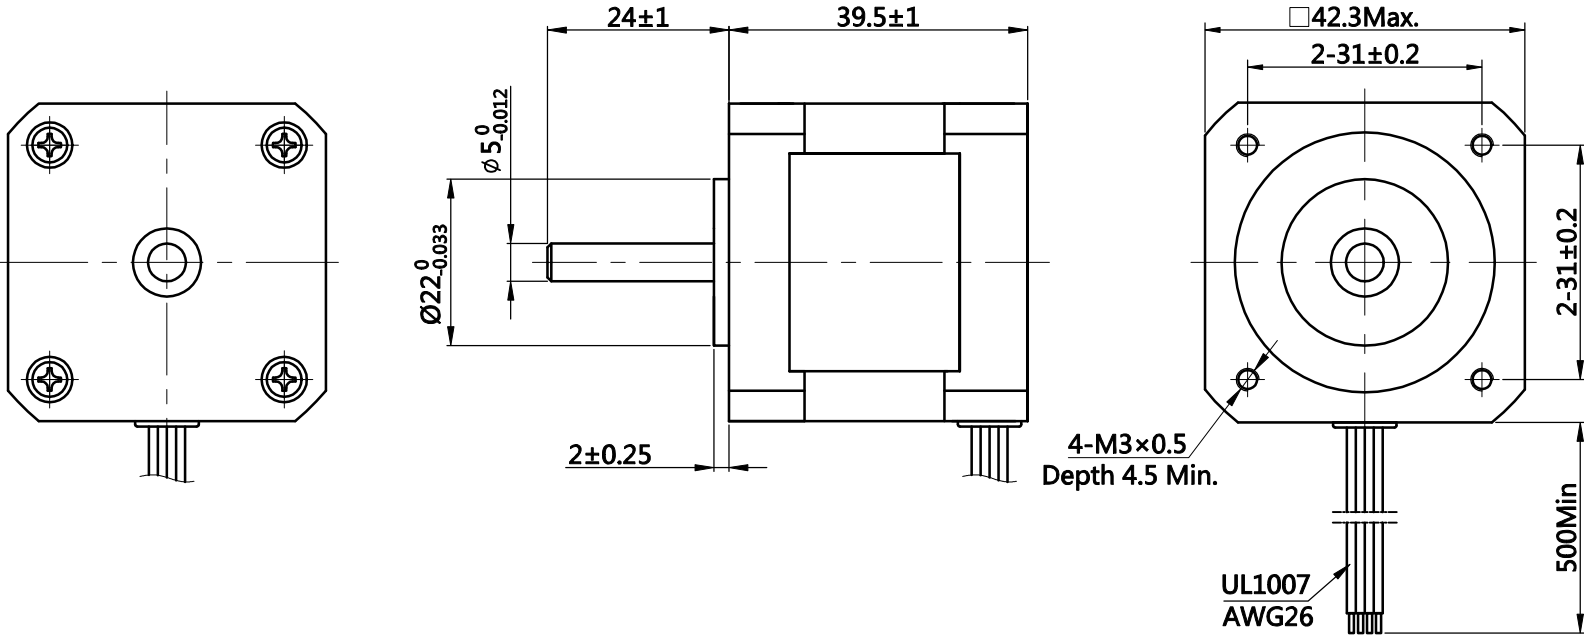


Wiring Diagram



Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW ↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side



E	1、 Number of Phase	2					
	2、 Step Angle	1.8° deg.					
	3、 Rated Voltage	2.55 V					
	4、 Rated Current/Phase	1.7 A (峰值 Peak Value)					
F	5、 Phase Resistance	1.5 Ω±10%(20°C)		REV.	REVISION RECORD		DATE
	6、 Phase Inductance	2.3 mH±20%(1kHz 1V RMS)		DESIGN	成兆茹 2020.6.29	Specification	
	7、 Holding Torque	4.2 kg.cm		STANDARD			
	8、 Insulation Class	B (130°) ;温升 80K Max.		TECHNOLOGY			
	9、 Weight	0.24 kg		CHECK			
Specifications		Comment	APPROVE				

TITLE	STEPPING MOTOR				
DWG.NO.	JK42HS40-1704				
MATERIAL		ECN SIGN	※	SIZE	A4
REV.	A	SCALE	1:2	SHEET	1 of 1