



HYBRID STEPPING MOTOR SPECIFICATION

DIMENSIONS unit=mm

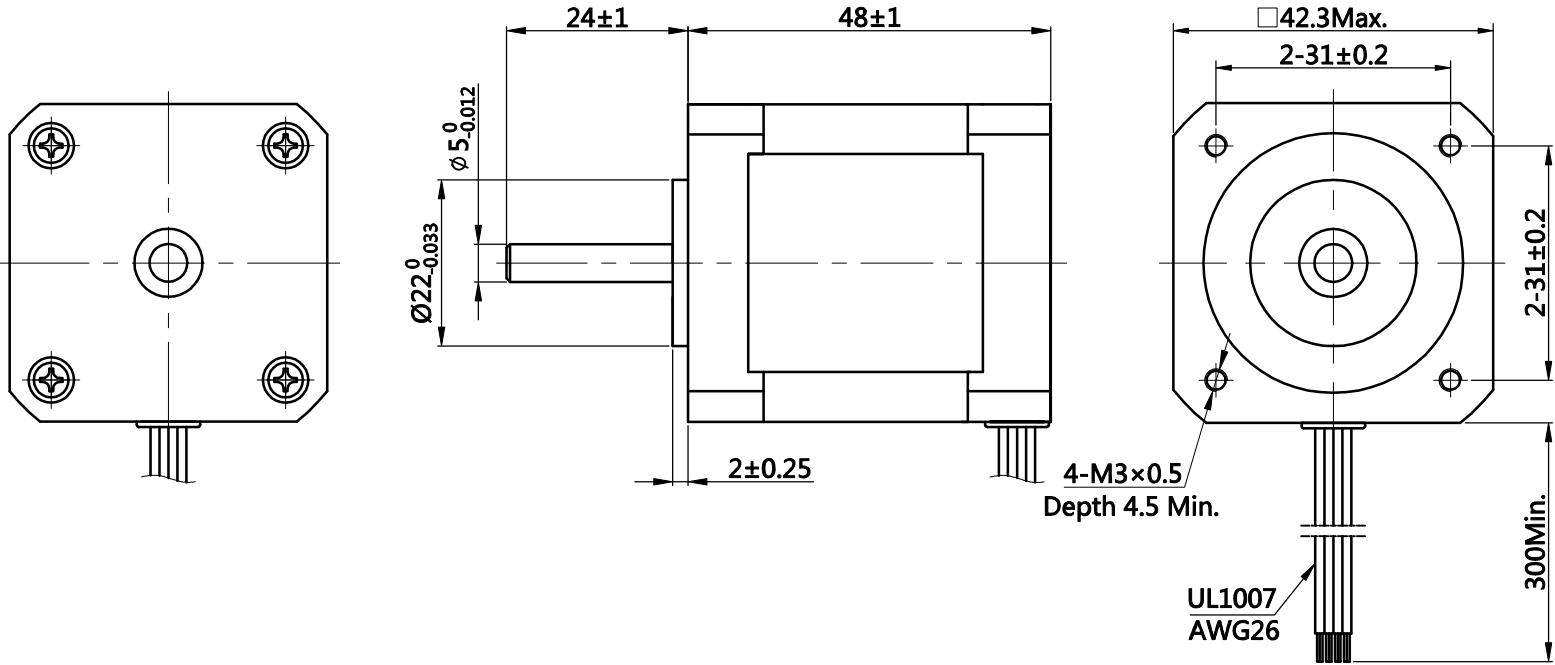


Wiring Diagram



Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side



1、 Number of Phase	2	REV.	REVISION RECORD		DATE
2、 Step Angle	1.8° deg.		DESIGN	成兆茹 2020.6.30	
3、 Rated Voltage	2.8 V		STANDARD		
4、 Rated Current/Phase	1.68 A (峰值 Peak Value)		TECHNOLOGY		
5、 Phase Resistance	1.65 Ω ±0.1(20°C)		CHECK		
6、 Phase Inductance	2.8 mH±20%(1kHz 1V RMS)		APPROVE		
7、 Holding Torque	5.0 kg.cm		Specification		
8、 Insulation Class	B (130°) ; 温升 80K Max.				
9、 Weight	0.34 kg				
Specifications		Comment			

TITLE	STEPPING MOTOR				
DWG.NO.	JK42HS48-1684-01				
MATERIAL		ECN SIGN	※	SIZE	A4
REV.	A	SCALE	1:2	SHEET	1 of 1